

320x320 - 520 m<sup>3</sup>/h




## RC 20.32

- Axial fans supplied with grille and filter;
- Medium external profile;
- IP44 or IP54 protection degree;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Operating temperature range: -20°C +50°C;
- Possible installation with screws (provided);
- Electrical connection through terminal block;
- Ball bearing motor;
- Body made of ABS self-extinguishing material grey RAL 7035;
- Grilles in grey RAL 7032 and 7035, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- Slotted external grilles to allow drainage of condensation;
- In accordance with European Standard EN 60529, EN 60335-2-80.


### TECHNICAL DATA

Model	Code	IP	Grille colour	Volt 50/60 Hz	Flow rate m <sup>3</sup> /h		W	Nom. curr. in Amp	dB (A) 2m	Kg
					with filter	without filter				
RC 20.32	0095732	IP44	GREY RAL 7032	220-240	450	520	35	0,15	55	2,6
RC 20.32	0095735	IP44	GREY RAL 7035	220-240	450	520	35	0,15	55	2,6
RC 20.32	0095705	IP44	BLACK RAL 9005	220-240	450	520	35	0,15	55	2,6
RC 20.32	0096132	IP44	GREY RAL 7032	110-120	450	520	35	0,3	55	2,6
RC 20.32	0096135	IP44	GREY RAL 7035	110-120	450	520	35	0,3	55	2,6
RC 20.32	0096105	IP44	BLACK RAL 9005	110-120	450	520	35	0,3	55	2,6
RC 20.32	0089632	IP54	GREY RAL 7032	220-240	400	520	35	0,15	55	2,6
RC 20.32	0089635	IP54	GREY RAL 7035	220-240	400	520	35	0,15	55	2,6
RC 20.32	0089605	IP54	BLACK RAL 9005	220-240	400	520	35	0,15	55	2,6
RC 20.32	0089532	IP54	GREY RAL 7032	110-120	400	520	35	0,3	55	2,6
RC 20.32	0089535	IP54	GREY RAL 7035	110-120	400	520	35	0,3	55	2,6
RC 20.32	0089505	IP54	BLACK RAL 9005	110-120	400	520	35	0,3	55	2,6


### DIMENSIONS

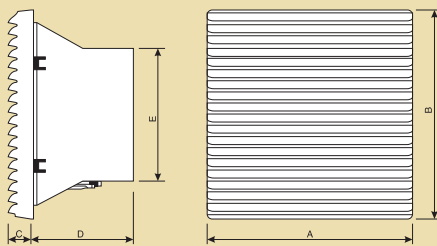

Model	A	B	C	D	∅ E	Kg
RC 20.32	323	322	34	140	204	2,6

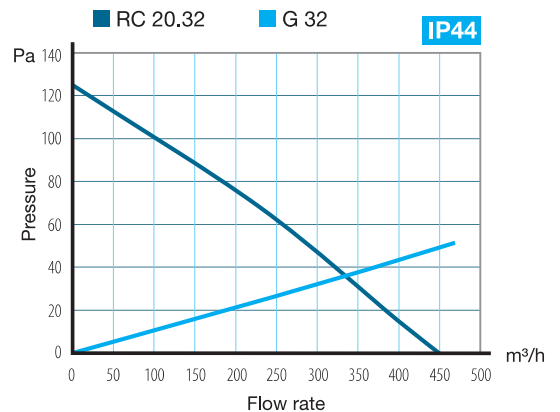

### DRILLING SCHEME FOR FAN ASSEMBLY AND GRILLE



Model	A	B	C	D	E	F (∅)	G (r)
RC 20.32	302	297	287	281	100	3,5	12,5

