

# T6CC Ordering Code

T6CC-**W**-022-008-1 R 00 - C 1 00  
 ① ② P1 P2 ④ ⑤ ⑥ ⑦ ⑧ ⑨  
 ③

- ① **Series**
- ② **Use for Severe duty shaft only**
- ③ **Cam ring for " P1 " & " P2 "**  
 Volumetric displacement (cm<sup>3</sup>/rev)
 

003 = 10.8	017 = 58.3
005 = 17.2	020 = 63.8
006 = 21.3	022 = 70.3
008 = 26.4	025 = 79.3
010 = 34.1	028 = 88.8
012 = 37.1	031 = 100.0
014 = 46.0	

- ④ **Type of shaft**
  - 1 = keyed (no SAE)
  - 3 = Splind (SAE BB)
  - 5 = Splind (SAE B)
- W version**
  - 2 = keyed (SAE BB)
  - S = splined (DIN 5462)

- ⑤ **Direction of rotation**  
 (view on shaft end)  
 R = clockwise  
 L = counter - clockwise
- ⑥ **Porting combination**  
 00 = standard
- ⑦ **Design letter**
- ⑧ **Seal class**
  - 1 = S1 (for mineral oil)
  - 4 = S4 (for fire resistant fluids)
  - 5 = S5 (for mineral oil and fire resistant fluids)


⑨ **Mounting W/connection variables**

Code	P1=1", S=3"		P1=1", S=2 1/2" 2)		
	P2	1"	3/4" 1)	1"	3/4" 1)
	Unc	00	01	10	11
	Metric	0M	W0	1M	W1

- 1) for 46 mℓ/rev. max.
- 2) for 126 mℓ/rev. max.

The large cartridge must be always mounted in the front.


**INTERNAL LEAKAGE (TYPICAL)**

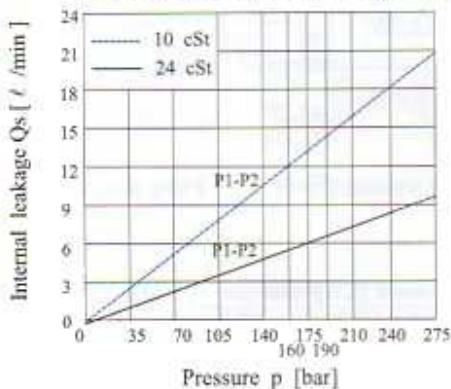

Do not operate pump more than 5 seconds at any speed or viscosity if internal leakage is more than 50 % of theoretical flow.


Total leakage is the sum of each section loss at its operating conditions.

**HYDROMECHANICAL POWER LOSS (TYPICAL)**

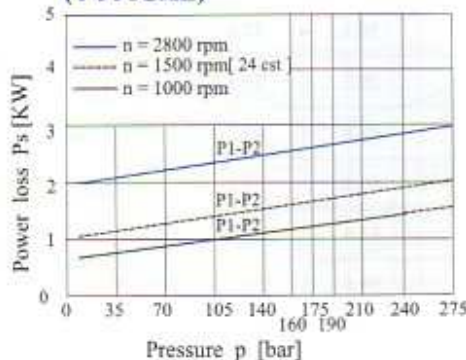




Total hydromechanical power loss is the sum of each section at its operating conditions.

**PERMISSIBLE RADIAL LOAD**

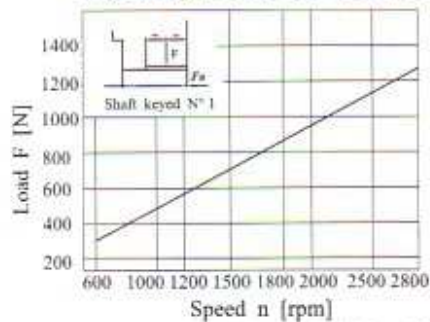

Maximum permissible axial load Fa = 800 N

# T6CC Dimensional Drawing

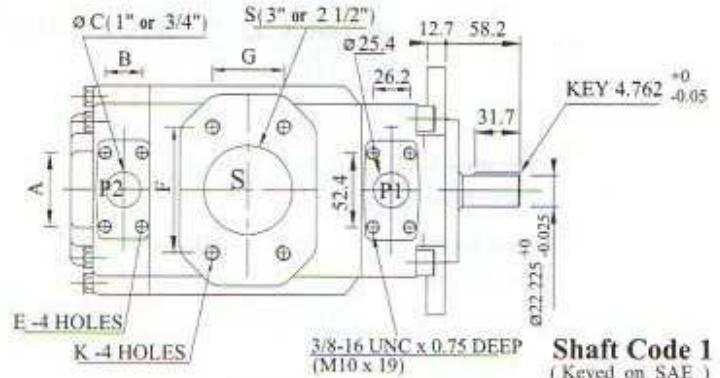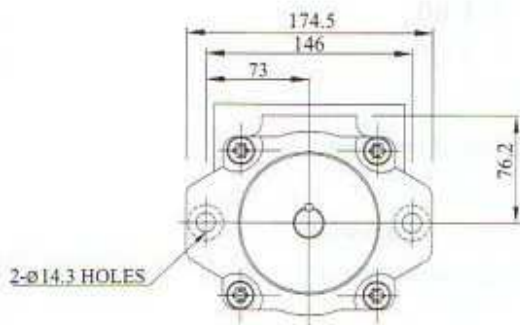


**Shaft code 3**  
SAE BB Splined shaft  
class 1 - J498 b 16/32  
dp. -15 teeth 30°  
pressure angle. Flat root  
side fit.



**Shaft code 5**  
SAE B Splined shaft  
class 1 - J498 b 16/32  
dp. -13 teeth 30°  
pressure angle. Flat root  
side fit.



**Shaft code S**  
DIN 5462  
B8x32x36  
5.96 +0/-0.03  
ø31.89 +0/-0.02

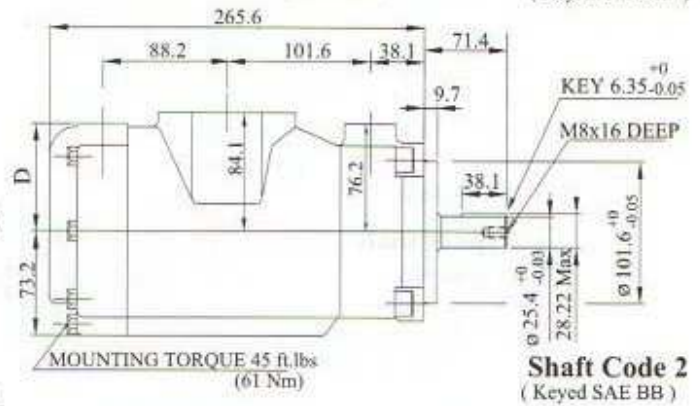

**Shaft Code 2**  
(Keyed SAE BB)

Alternate Port								
S = 3"					S = 2 1/2"			
F	106.4				88.9			
G	61.9				50.8			
øH	76.2				63.5			
Code	00	01	0M	W0	10	11	1M	W1
A	52.4	47.6	52.4	47.6	52.4	47.6	52.4	47.6
B	26.2	22.2	26.2	22.2	26.2	22.2	26.2	22.2
øC	25.4	19.0	25.4	19.0	25.4	19.0	25.4	19.0
D	74.7	76.2	74.7	76.2	74.7	76.2	74.7	76.2
E	3/8"-16UNCx19 deep		M10x19 deep		3/8"-16UNCx19 deep		M10x19 deep	
K	5/8"-11UNCx28.4 deep		M16x28.4 deep		1/2"-13UNCx23.9 deep		M12x24.0 deep	

Shaft torque limits (ml/rev x bar)		
Pump	Shaft	Vp x p max.P1+P2
KT6CC	1	14300
	2	21420
	3	32670
	5	20600

## T6CC OPERATING CHARACTERISTICS - TYPICAL [24 cSt] (input power p (kw) for one cartridge only)

Pressure port	Series	Volumetric Displacement Vp	Flow qvc [l/min] [1500rpm]			Input power P [KW] [1500rpm]			P Max Kg/cmf	Max r.p.m
			P = 0 bar	P = 140 bar	P = 240 bar	P = 7 bar	P = 140 bar	P = 240 bar		
P1 & P2	003	10.8ml/rev	16.2	10.7	—	1.3	5.3	—	275	2800
	005	17.2ml/rev	25.8	20.3	15.8	1.4	7.5	12.2		
	006	21.3ml/rev	31.9	26.5	22.0	1.5	8.9	14.7		
	008	26.4ml/rev	39.6	34.1	29.6	1.6	10.7	17.7		
	010	34.1ml/rev	51.1	45.7	41.2	1.7	13.4	22.3		
	012	37.1ml/rev	55.6	50.2	45.7	1.7	14.4	24.1		
	014	46.0ml/rev	69.0	63.5	59.0	1.9	17.6	29.5		
	017	58.3ml/rev	87.4	82.0	77.5	2.1	21.9	36.9		
	020	63.8ml/rev	95.7	90.2	85.7	2.2	23.8	40.2		
	022	70.3ml/rev	105.4	100.0	95.5	2.3	26.1	44.1		
	025 <sub>1)</sub>	79.3ml/rev	118.9	113.5	109.0	2.5	29.2	49.5		
	028 <sub>1)</sub>	88.8ml/rev	133.2	127.7	124.5 <sub>2)</sub>	2.8	32.7	48.5 <sub>2)</sub>		
	031 <sub>1)</sub>	100.0ml/rev	150.0	144.5	141.3 <sub>2)</sub>	2.8	36.5	54.4 <sub>2)</sub>		

1) 025 - 028 - 031 = 2500 rpm, max

2) 028 - 031 = 210 bar max, int.

Min Speed : 600 rpm