
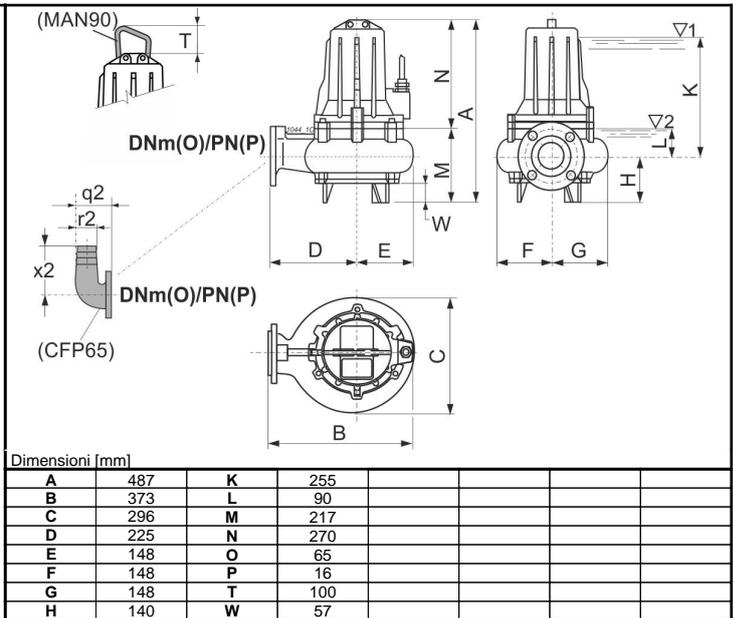


Customer:		Ref.:	
Item	Quantity	Required flow rate	n.d.
Type	SUBMERSIBLE ELECTRIC PUMP FOR WASTE WATER	Model	KCM065FA+002221N1

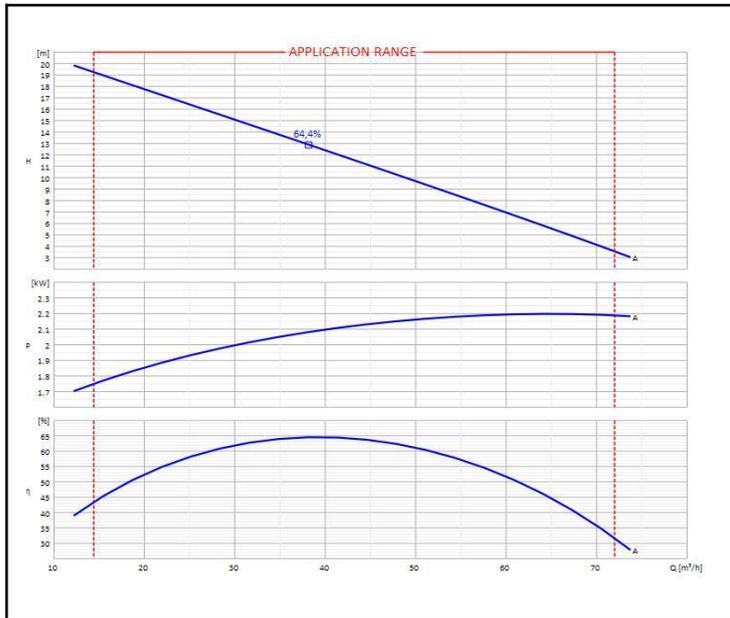

OPERATING DATA - ISO 9906:2012 3B -					CONSTRUCTION CHARACTERISTICS			
Q [m³/h]	H [m]	P [kW]	η [%]	NPSH [m]	Delivery diameter	65 mm		
					Type of Impeller	Single channel		
					Moment of inertia	0,00914 Kg·m²		
					Electric pump weight	Installation	54	Kg
					Seal on pump side	Motor side	Mechanical	Mechanical
					Type of installation	n.d.		
					Operation	Continuous (S1)		

OPERATING LIMITS			OPERATING CHARACTERISTICS			
Pumped liquid	Waste water		Service flow rate	n.d.		n.d.
Max. temperature of pumped liquid	40	°C	Service head	n.d.		n.d.
Maximum density	1	kg/dm³	H (Q=0)	Hmax	25,5	19,22
Maximum viscosity	1	mm²/s	Qmin	Qmax	14,4	72
Max. solid content	4	%	Power consumption at duty point	n.d.		n.d.
Max. number of starts/hr	20		Max power consumption	2,2		kW
Free passage	40	mm	Pump efficiency	Overall	n.d.	n.d.
Minimum immersion depth	255	mm	Sense of rotation (*)	Clockwise		

ELECTRIC PUMP MATERIALS		ELECTRIC MOTOR CHARACTERISTICS			
Support bearing	Nodular cast iron	Nominal power	2,2		kW
Cable clamp	Brass	Rated frequency	50		Hz
Round power cable	n.d.	Rated voltage	400		V
Motor casing	Cast iron	Rated current	4,9		A
Stator	Electrical steel	No. Poles	Rotation speed	2	2860
Complete shaft with rotor	Stainless steel/Magnetic steel	Type of motor	3 ~		
Conductivity probe	n.d.	Efficiency 4/4	80,0 %		
Elastic ring	Steel	Power factor 4/4	0,800		
Delivery body	Cast iron	Is/In	Ts/Tn	6	n.d.
Suction support	Cast iron	Thermal protection			
Impeller	Cast iron	Insulation class	F		
Ring impeller seat	Steel/Rubber	Protection class	IP68		
Mechanical seal on pump side	silicon carbide/ceramic	Explosion-proof	n.a.		
Mechanical seal on motor side	Ceramic/graphite	Power supply cable	Length	H07RN8	10
Screws and nuts	Stainless steel	Efficiency class	S.F	****	

Notes:	(*) Viewed from motor coupling side	
OFFER No.	Pos.	Date
		04/07/2017