


Specifications subject to changes without notice

Vacuum filters 5...250

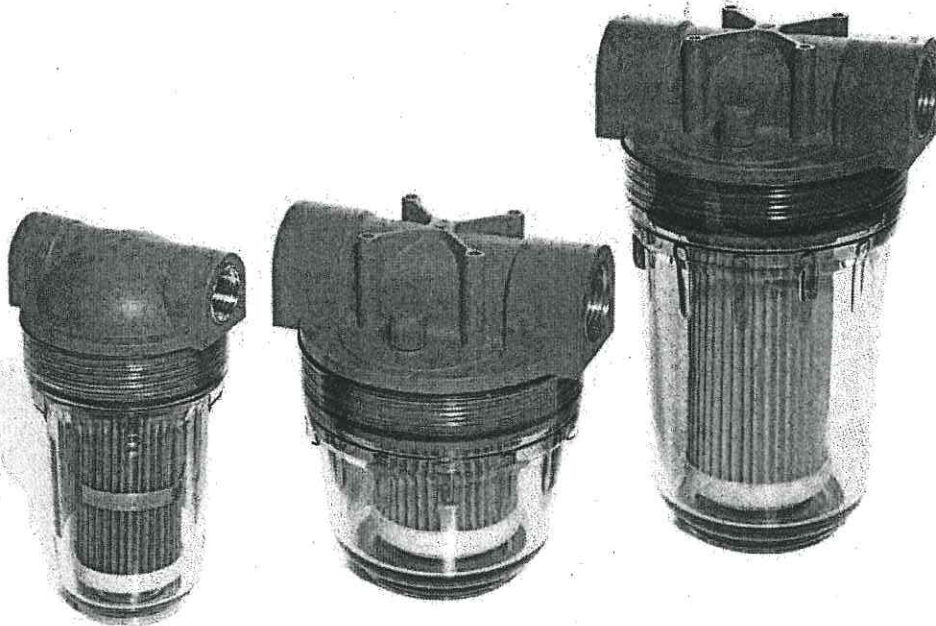

13902

- AAVA-AFCV PAPER filter (porosity 15 micr.)
- AAVA-AFMV STAINLESS STEEL filter (porosity 60 micr.)

2x

Type:	AAVA-AFMV- ... AAVA-AFCV- ...	5	6	6-1/4	20	25	60	100	150	250
Max. Vacuum flow	m <sup>3</sup> /h	4,5	6	6	20	25	60	100	150	250
Max. vacuum level	mbar	1x10 <sup>-2</sup>								
PAPER Filter		YES	YES	YES	YES	YES	YES	YES	YES	YES
STAINLESS STEEL Filter		NO	YES	YES	YES	YES	YES	YES	YES	YES
Trasparent housing		YES	YES	YES	YES	YES / NO	YES	YES	YES	YES / NO
Max. Weight	Kg.	0,02	0,1	0,1	0,4	0,4	0,8	1,0	1,3	3,0
Material		ABS - BRASS - AL - PLEXIGLASS								

SPARE PART

PAPER Filter	AAVA	--	CV006	CV006	<del>CV020</del>	CV025	CV060	CV100	CV150	CV250
STAINLESS STEEL Filter	AAVA	--	MV006	MV006	MV020	MV025	MV060	MV100	MV150	MV250

Dimensions mm	A	B	C	D	E	F	G	H	n. of cartridge	L	M	N
	--	3/8"	1/4"	1/2"	1/2"	1"	1"	1"	1" 1/2"-(2")			
	--	65	65	100	165	150	225	305	260			
	--	60	60	80	87	130	130	130	190			
	--	75	75	138	175	170	245	325	300			
	--	62	62	82	90	132	132	132	193			
	--	12	12	22	25	30	30	30	50			
	--	35	35	61	45	70	70	70	150			
	--	33	33	70	120	98	173	247	170			
	--	1	1	1	1	1	1	1	1			
	39	--	--	--	--	--	--	--	--			
	49	--	--	--	--	--	--	--	--			
	109	--	--	--	--	--	--	--	--			