

DMP 331



Industrial Pressure Transmitter for Low Pressure

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 / 0.1 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 60 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

Special characteristic

- ▶ perfect thermal behaviour
- ▶ excellent long term stability
- ▶ pressure port
G 1/2" flush from 100 mbar

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe
for gases and dusts
- ▶ SIL 2-according to
IEC 61508 / IEC 61511
- ▶ welded pressure sensor
- ▶ customer specific versions

The pressure transmitter DMP 331 can be used in all industrial areas when the medium is compatible with stainless steel 1.4404 (316 L) or 1.4435 (316 L). Additional are different elastomer seals as well as a helium tested welded version available.

The modular concept of the device allows to combine different stainless steel sensors and electronic modules with a variety of electrical and mechanical versions. Thus a diversity of variations is created, meeting almost all requirements in industrial applications.

Preferred areas of use are



Plant and machine engineering



Environmental engineering
(water - sewage - recycling)



Energy industry



DMP 331

Industrial Pressure Transmitter

Technical Data

Input pressure range																										
Nominal pressure gauge	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6																	
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6																	
Overpressure	[bar]	5	0.5	1	1	2	5	5	10																	
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15																	
Nominal pressure gauge / abs.	[bar]	2.5	4	6	10	16	25	40	60																	
Overpressure	[bar]	10	20	40	40	80	80	105	105																	
Burst pressure ≥	[bar]	15	25	50	50	120	120	210	210																	
Vacuum resistance		$p_N \geq 1$ bar: unlimited vacuum resistance $p_N < 1$ bar: on request																								
Output signal / Supply																										
Standard		2-wire: 4 ... 20 mA	/	$V_S = 8 \dots 32 \text{ V}_{\text{DC}}$			SIL-version: $V_S = 14 \dots 28 \text{ V}_{\text{DC}}$																			
Option IS-protection		2-wire: 4 ... 20 mA	/	$V_S = 10 \dots 28 \text{ V}_{\text{DC}}$			SIL-version: $V_S = 14 \dots 28 \text{ V}_{\text{DC}}$																			
Options 3-wire		3-wire: 0 ... 20 mA	/	$V_S = 14 \dots 30 \text{ V}_{\text{DC}}$																						
		0 ... 10 V	/	$V_S = 14 \dots 30 \text{ V}_{\text{DC}}$																						
Performance																										
Accuracy ¹		standard:	nominal pressure < 0.4 bar:	$\leq \pm 0.50 \%$ FSO																						
			nominal pressure ≥ 0.4 bar:	$\leq \pm 0.35 \%$ FSO																						
		option 1:	nominal pressure ≥ 0.4 bar:	$\leq \pm 0.25 \%$ FSO																						
		option 2:	for all nominal pressure ranges:	$\leq \pm 0.10 \%$ FSO																						
Permissible load		current 2-wire:	$R_{\text{max}} = [(V_S - V_{S \text{ min}}) / 0.02 \text{ A}] \Omega$																							
		current 3-wire:	$R_{\text{max}} = 240 \Omega$																							
		voltage 3-wire:	$R_{\text{min}} = 10 \text{ k}\Omega$																							
Influence effects		supply:	0.05 % FSO / 10 V			load:	0.05 % FSO / kΩ																			
Long term stability		$\leq \pm 0.1 \%$ FSO / year at reference conditions																								
Response time		2-wire:	$\leq 10 \text{ msec}$			3-wire:	$\leq 3 \text{ msec}$																			
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																										
Thermal effects (offset and span)																										
Nominal pressure p_N	[bar]	-1 ... 0		< 0.40		≥ 0.40																				
Tolerance band	[% FSO]	$\leq \pm 0.75$		$\leq \pm 1$		$\leq \pm 0.75$																				
in compensated range	[°C]	-20 ... 85		0 ... 70		-20 ... 85																				
Permissible temperatures																										
Permissible temperatures		medium:	$-40 \dots 125 \text{ }^{\circ}\text{C}$																							
		electronics / environment:	$-40 \dots 85 \text{ }^{\circ}\text{C}$																							
		storage:	$-40 \dots 100 \text{ }^{\circ}\text{C}$																							
Electrical protection																										
Short-circuit protection		permanent																								
Reverse polarity protection		no damage, but also no function																								
Electromagnetic compatibility		emission and immunity according to EN 61326																								
Mechanical stability																										
Vibration		10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6																								
Shock		500 g / 1 msec according to DIN EN 60068-2-27																								
Materials																										
Pressure port		stainless steel 1.4404 (316 L)																								
Housing		stainless steel 1.4404 (316 L)																								
Option compact field housing		stainless steel 1.4301 (304); cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)																								
Seals		standard:	FKM																							
		options:	EPDM																							
			welded version ² (for $p_N \leq 40$ bar)																							
			others on request																							
Diaphragm		stainless steel 1.4435 (316 L)																								
Media wetted parts		pressure port, seals, diaphragm																								
² welded version only with pressure ports according to EN 837, $p_N \leq 40$ bar																										
Explosion protection (only for 4 ... 20 mA / 2-wire)																										
Approvals		IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X																								
DX19-DMP 331		zone 0: II 1G Ex ia IIC T4 Ga																								
		zone 20: II 1D Ex ia IIIC T135 °C Da																								
Safety technical maximum values		$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$, $C_i \approx 0 \text{ nF}$, $L_i \approx 0 \mu\text{H}$, the supply connections have an inner capacity of max. 27 nF to the housing																								
Permissible temperatures for environment		in zone 0:	-20 ... 60 °C with $p_{\text{atm}} 0.8$ bar up to 1.1 bar																							
		in zone 1 or higher:	-40/-20 ... 70 °C																							
Connecting cables (by factory)		cable capacitance:	signal line/shield also signal line/signal line: 160 pF/m																							
		cable inductance:	signal line/shield also signal line/signal line: 1 μH/m																							

DMP 331

Industrial Pressure Transmitter

Technical Data

Miscellaneous


Option SIL2 version ³	according to IEC 61508 / IEC 61511
Current consumption	signal output current: max. 25 mA
Weight	approx. 200 g
Installation position	any ⁴
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

³ only for 4 ... 20 mA / 2-wire, not in combination with accuracy 0.1 %


⁴ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $p_N \leq 1$ bar.

Wiring diagrams

2-wire-system (current)

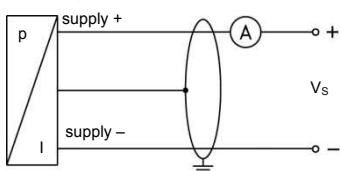

3-wire-system (current / voltage)

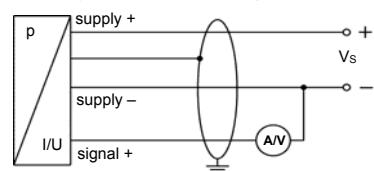


Pin configuration





Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1/ metal (4-pin)	Bayonet MIL-C-26482 (10-6)		compact field housing	cable colours (IEC 60757)
				2-wire	3-wire		
Supply +	1	3	1	A	A	IN +	WH (white)
Supply -	2	4	2	B	D	IN -	BN (brown)
Signal + (for 3-wire)	3	1	3	-	B	OUT +	GN (green)
Shield	ground pin	5	4	pressure port			GNYE (green-yellow)

Electrical connections (dimensions in mm)


standard




options




ISO 4400
(IP 65)




Binder series 723, 5-pin
(IP 67)




M12x1, 4-pin
(IP 67)




Bayonet MIL-C-26482 (10-6)
(IP 67)

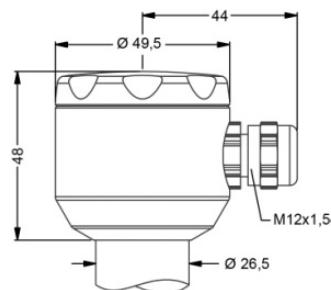

compact field housing
(IP 67)



cable outlet with PVC cable
(IP 67)⁵



cable outlet, cable with
ventilation tube (IP 68)⁶


⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

⁵ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

⁶ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connections (dimensions in mm)

standard

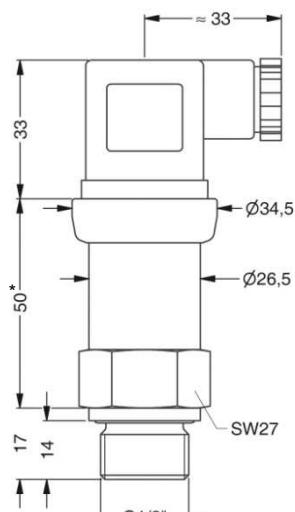


G1/2" DIN 3852
with ISO 4400

SIL- and SIL-IS-version

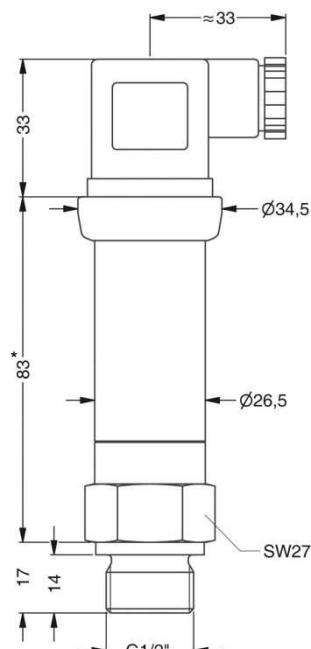


G1/2" DIN 3852
with ISO 4400


options




G1/2" EN 837




G1/2" DIN 3852 open port, $p_N \leq 40$ bar

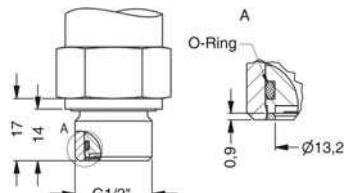


G1/2" DIN 3852
with flush sensor, $p_N \leq 40$ bar




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇒ metric threads and other versions on request

* with electrical connection Bayonet MIL-C-26482 (10-6) increases the length of devices by 5 mm

Ordering code DMP 331

DMP 331	[] [] - [] [] - [] - [] - [] [] - [] - [] []	
Pressure		
gauge	1 1 0	
absolute ¹	1 1 1	
Input	[bar]	
0.10 ¹	1 0 0 0	
0.16 ¹	1 6 0 0	
0.25 ¹	2 5 0 0	
0.40	4 0 0 0	
0.60	6 0 0 0	
1.0	1 0 0 1	
1.6	1 6 0 1	
2.5	2 5 0 1	
4.0	4 0 0 1	
6.0	6 0 0 1	
10	1 0 0 2	
16	1 6 0 2	
25	2 5 0 2	
40	4 0 0 2	
60	6 0 0 2	
-1 ... 0	X 1 0 2	
customer	9 9 9 9	consult
Output		
4 ... 20 mA / 2-wire	1	
0 ... 20 mA / 3-wire	2	
0 ... 10 V / 3-wire	3	
intrinsic safety 4 ... 20 mA / 2-wire	E	
SIL2 4 ... 20 mA / 2-wire	1S	
SIL2 with intrinsic safety		
4 ... 20 mA / 2-wire	ES	
customer	9	consult
Accuracy		
standard for $p_N \geq 0.4$ bar:	0.35 % FSO	3
standard for $p_N < 0.4$ bar:	0.50 % FSO	5
option 1 for $p_N \geq 0.4$ bar:	0.25 % FSO	2
option 2:	0.10 % FSO ²	1
customer	9	consult
Electrical connection		
male and female plug ISO 4400	1 0 0	
male plug Binder series 723 (5-pin)	2 0 0	
cable outlet with PVC cable (IP67) ³	T A 0	
cable outlet,	T R 0	
cable with ventilation tube (IP68) ⁴		
male plug M12x1 (4-pin) / metal	M 1 0	
Bayonet MIL-C-26482 (10-6); 2 wire	B G 0	
Bayonet MIL-C-26482 (10-6); 3 wire	B G 4	
compact field housing		
stainless steel 1.4301 (304)	8 5 0	
customer	9 9 9	consult
Mechanical connection		
G1/2" DIN 3852	1 0 0	
G1/2" EN 837	2 0 0	
G1/4" DIN 3852	3 0 0	
G1/4" EN 837	4 0 0	
G1/2" DIN 3852	F 0 0	
with flush sensor ⁵		
G1/2" DIN 3852 open pressure port ⁵	H 0 0	
1/2" NPT	N 0 0	
1/4" NPT	N 4 0	
customer	9 9 9	consult
Seals		
FKM	1	
EPDM	3	
without (welded version) ^{5, 6}	2	
customer	9	consult
Special version		
standard	0 0 0	
customer	9 9 9	consult

¹ absolute pressure possible from 0.4 bar

² not in combination with SIL

³ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C), others on request

⁴ code TR0 = PVC cable, cable with ventilation tube available in different types and lengths

⁵ only for $p_N \leq 40$ bar

⁶ welded version only with pressure ports according to EN 837