


# Tohnichi New Torque Wrench Series Model QL·QL5 / CL·CL5

PAT.PEND

**New-Designed Structure and Functions!  
Effective improvement accomplished and becomes  
more user-focused torque wrench!!!**

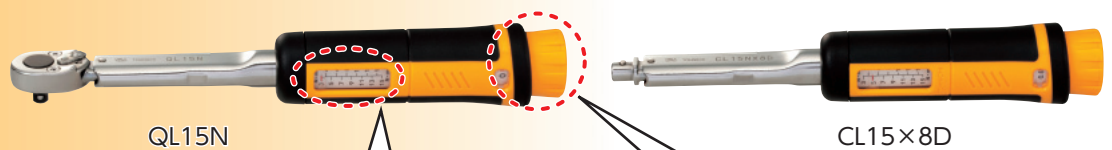

QL15N

CL15×8D

**Large-Size Memory Scale!  
Clear and Easy Reading**



**New-Designed Lock System!**



- **Newly-Developed Lock-Structure**  
Operation in secure  
Set-Torque remains solidly
- **New Design Resin Grip**  
Easy to hold  
Easy to handle
- **Wide, Simple, & Clear Scale**  
Easy to set torque  
Easy to read torque value
- **3 Optional Color Caps Available**  
Standard Cap color: Black  
Optional colors\*: Green, Blue, and Red  
Capable of identifying torque wrench by colors  
\*sold separately
- **Accuracy  $\pm 3\%$  with Certificate of Calibration**



**MAX 2 N·m, 5 N·m, 10 N·m, 15 N·m, 25 N·m**  
Torque

Your Torque Partner



# QL·QL5



QL5

Accuracy ±3%

S.I. Model	Torque Range[N·m]		Metric Model	Torque Range[kgf·cm]		American Model	Torque Range[lbf·in]		Overall Length [mm]	Square Drive [mm]	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.			
QL2N	0.4-2	0.02	20QL	4-20	0.2	QL151-2A	3-15	0.1	194	6.35	0.27
QL5N	1-5	0.05	50QL	10-50	0.5	QL301-2A	6-30	0.2			
QL10N	2-10	0.1	100QL	20-100	1	QL501-2A	10-50	0.5	219		0.29
QL15N	3-15		150QL	30-150		QL1001-2A	20-100				
QL25N5-1/4	5-25	0.2	225QL5-1/4	50-250	2.5	QL2001-2A	50-200	2.5	237	9.5	0.33
QL25N5			225QL5			QL2001-3A					



QL5M5

Accuracy ±3%

S.I. Model	Torque Range[N·m]		Metric Model	Torque Range[kgf·cm]		American Model	Torque Range[lbf·in]		Overall Length [mm]	Square Drive [mm]	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.			
QLMS15N	3-15	0.1	150QLMS	30-150	1	-	-	-	219	6.35	0.48
QLLS25N5	5-25	0.2	225QL5L5	50-250	2.5	-	-	-	237	9.5	0.5

QLMS10N, 100QLMS are also available upon request.

# CL·CL5



CL5

Accuracy ±3%

S.I. Model	Torque Range[N·m]		Metric Model	Torque Range[kgf·cm]		American Model	Torque Range[lbf·in]		Overall Length [mm]	Tohnichi Head Size	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.			
CL2N×8D	0.4-2	0.02	20CL	4-20	0.2	CL151×8D	3-15	0.1	174	8D	0.27
CL5N×8D	1-5	0.05	50CL	10-50	0.5	CL301×8D	6-30	0.2			
CL10N×8D	2-10	0.1	100CL	20-100	1	CL501×8D	10-50	0.5	199		0.29
CL15N×8D	3-15		150CL	30-150		CL1001×8D	20-100	1			
CL25N5×10D	5-25	0.2	225CL5	50-250	2.5	CL2001×10D	50-200	2.5	216	10D	0.33




CL5M5

Accuracy ±3%

S.I. Model	Torque Range[N·m]		Metric Model	Torque Range[kgf·cm]		American Model	Torque Range[lbf·in]		Overall Length [mm]	Tohnichi Head Size	Weight [kg]
	Min.-Max.	Grad.		Min.-Max.	Grad.		Min.-Max.	Grad.			
CLMS10N×8D	3-15	0.1	150CLMS	30-150	1	-	-	-	199	8D	0.45
CLLS25N5×10D	5-25	0.2	225CL5L5	50-250	2.5	-	-	-	216	10D	0.47

CLMS10N×8D, 100CLMS are also available upon request.

## Interchangeable Head

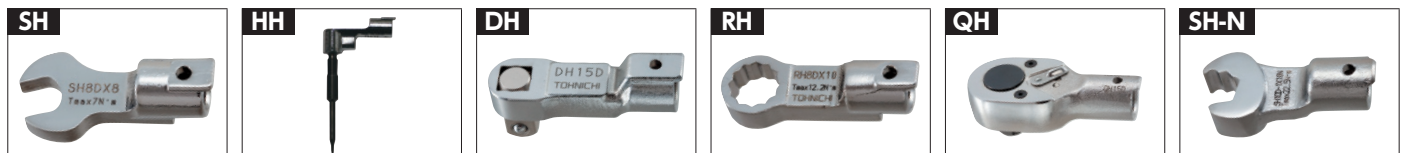

Your Torque Partner **TOHNICHI**

**TOHNICHI MFG. CO., LTD**  
 URL: <http://tohnichi.jp/english/index.html>

**N.V. TOHNICHI EUROPE S.A.**  
 URL: <http://www.tohnichi.be>

**TOHNICHI AMERICA CORP.**  
 URL: <http://www.tohnichi.com>

**TOHNICHI SHANGHAI MFG.CO., LTD.**  
 URL: <http://www.tohnichi-sh.com/>